

QUICK GUIDE

Cable Harness



1 Cable harness connector to Control Box

2 Main Switch:

- (0) – OFF
- (1) - ONLY DETECTION & PARKING SENSOR
- (2) – ACTIVE MODE

3 LED feedback:

- STATIC GREEN: ready to work
- BLINKING GREEN: in parking sensor mode
- RED/GREEN: active mode in process (also the buzzer is beeping)

4 Buzzer:

Gives beeping alerts from active and parking sensor mode.

5 Red button:

Do not push the button. If more info needed, please call our call center.

6 BLACK wire:

Negative power supply - Ground


7 RED wire:

Constant +12V power supply! Take the fuse to its place after the installation.

8 YELLOW wire:

Connect to ACC +12V. This is the main power supply for the product.

ADJUSTING POTMETER

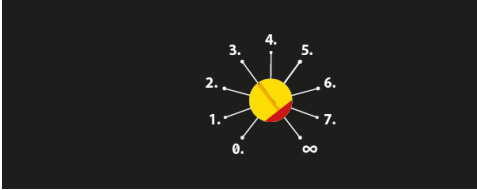

- 0 value
OFF mode
- ∞ value
Constant working
- 1-7 value
**Working time in seconds.
Restart 1 minute.**

